

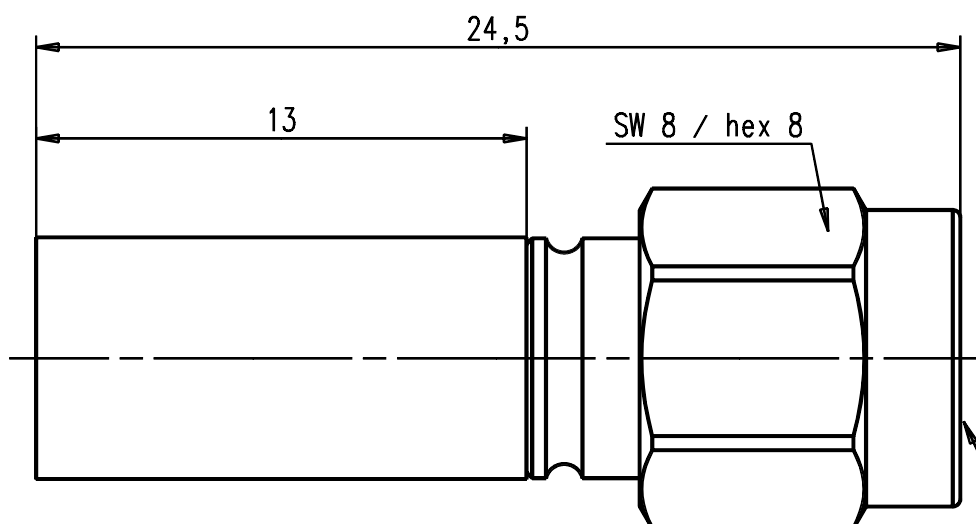
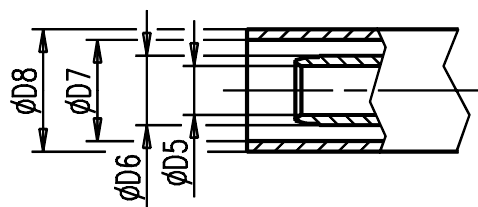


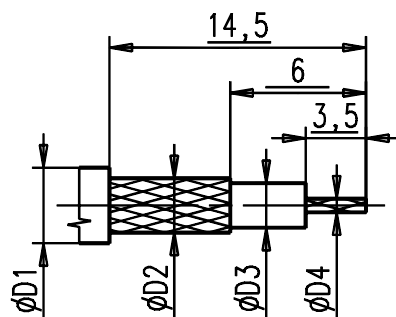

Steckbereich nach IEC 169-15 Grade1
Mating area acc.to IEC 169-15 Grade1

M 1:1
S 1:1

Kabelzuschnitt
Stripping dimension



Fuer Kabel /
For cable

Gr.	Type Typ	$\phi D1$ max.	$\phi D2$ max.	$\phi D3$ max.	$\phi D4$ max.	$\phi D5$	$\phi D6$	$\phi D7$	$\phi D8$	Crimp Aussen/out	Crimp Innen/in
8	RG 58 C/U	5,00	3,60	2,95	0,90	3,20	4,50	5,40	6,40	5,41	

IMS CONNECTOR
SYSTEMS

general tolerance
ISO 2768
mH

scale: 5:1 (1:1)

Assembly instruction: M16/K2
Stripping dimension:

					date	name	Kabelstecker Cable mount plug			
					generate	02.12.83				Grade
					checked					
					Norm					
					30928					
106/01	b	Ueberschrieben	13.02.01	Hogg			101.42.1410.08'		Rev.	
	a	Crimpbereich	25.10.85	R.Bä					b	
nr.	rev.	alteration	date	name						

Rev.
b